



光谱图

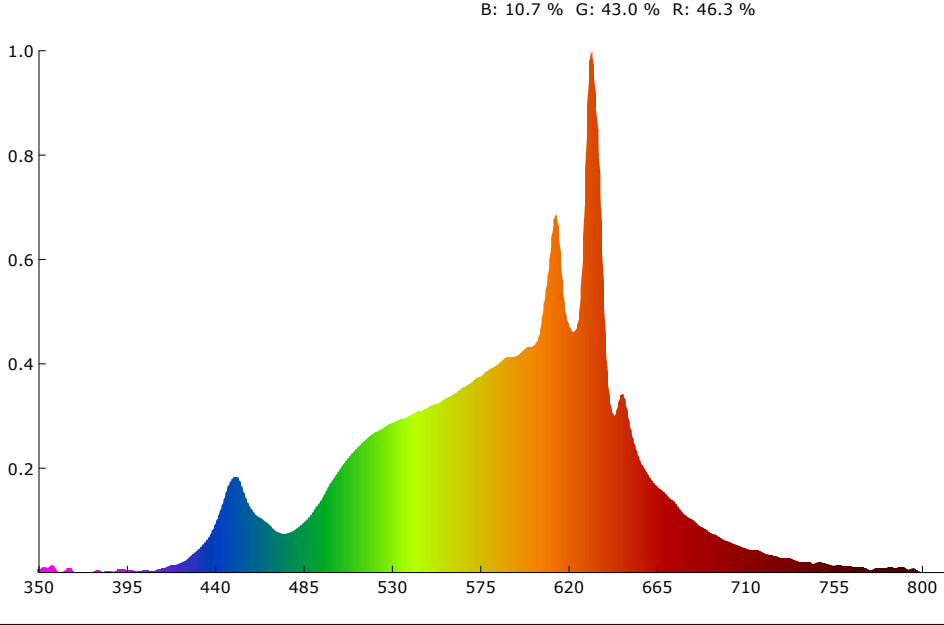

CIE1931

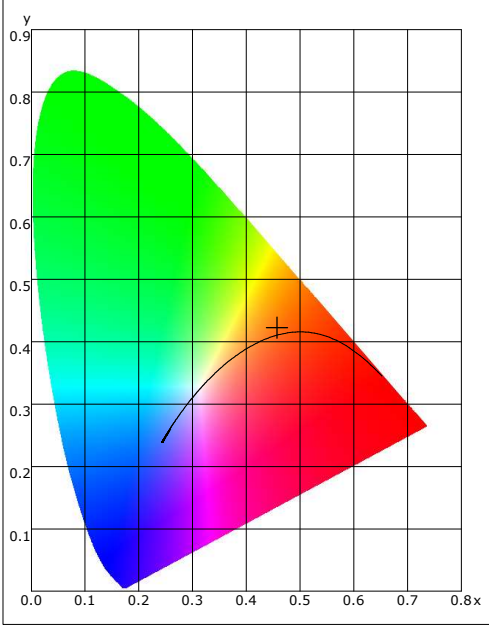


颜色参数：

GAI:	GAI_BB_8 : 98.03	GAI_BB_15 : 98.91	GAI_EES : 99.84	显色指数(Ra): 93.90	Ravg: 91.43
R 1: 98.40	R 2: 98.90	R 3: 98.40	R 4: 93.50	R 5: 89.40	R 6: 90.60
R 7: 94.80	R 8: 87.80	R 9: 62.10	R10: 92.80	R11: 96.50	R12: 78.60
R13: 98.10	R14: 98.00	R15: 93.50			
颜色质量表 :	色彩饱和度Qa: 79.11	还原度Qf: 77.38	还原偏好Qp: 94.83	色域参数Qg: 81.93	
Q1: 74.79	Q2: 91.20	Q3: 86.58	Q4: 79.61	Q5: 77.87	Q6: 79.89
Q7: 82.03	Q8: 80.61	Q9: 76.84	Q10: 74.66	Q11: 76.50	Q12: 76.95
Q13: 79.42	Q14: 79.96	Q15: 76.97			
x: 0.46	y: 0.42	u: 0.26	v: 0.35	u': 0.26	v': 0.53
红色比:46.31%	绿色比: 42.97%	蓝色比: 10.72%	光通量红色比:2.34%	光通量绿色比: 72.20%	光通量蓝色比: 25.46%





相关色温(K):2821.00	光通量(lm):859.29	峰值波长(nm):631.60	色容差 :4.33
明暗视觉比 :1.28	中心波长(nm):632.20	主波长(nm):582.27	质心波长(nm):585.40
半宽度(nm):12.30	光通量红色比:25.46	光通量绿色比:72.20	光通量蓝色比:2.34
黑体偏离duv:0.00	色纯度 %:63.96	LER(TM-30):342.77	辐射功率(mW):2506.90
色域指数Rg :98.93	逼真度Rf :92.14	红光辐照度(uW/cm2):1123.85	近红辐照度(uW/cm2):66.92
近红外辐照度(uW/cm2):5.67			
电参数			
电压(V):230.6000	电流(A):0.0400	功率(W):6.9000	功率因数 :0.7430
能效 :135.6191	光效(Lm/W):124.5354	能效等级 :D	

产品型号:S14d-500-SC	制造厂商:
产品编号:	Dongguan HongYu Lighting Technology Co.,LTD
测试人员:	测试单位:
备注:	测试日期:09/28/26


Rf: 92.1 CCT: 2821K u': 0.2560
Rg: 98.9 LER: 342.8 Duv: 0.00433 v': 0.5311

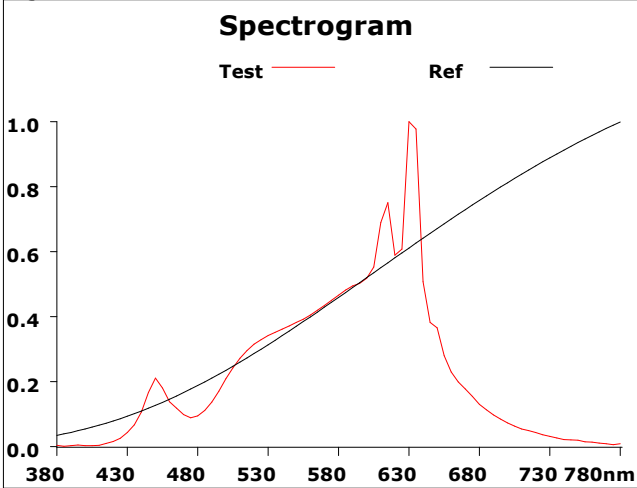


500			
Hue Bin	Rf	Chroma	Hue
1	90.4	-4.7%	-0.7%
2	93.5	-3.0%	1.2%
3	91.9	-2.0%	3.0%
4	95.0	-1.5%	1.7%
5	94.3	0.0%	3.9%
6	94.3	2.0%	2.3%
7	95.2	-0.4%	-1.6%
8	97.0	1.3%	0.1%
9	96.7	-1.0%	0.3%
10	93.3	-1.6%	2.7%
11	91.6	0.0%	5.3%
12	87.8	4.0%	-1.6%
13	87.4	2.5%	-8.1%
14	86.6	2.4%	-9.1%
15	92.6	-1.0%	-3.8%
16	84.8	-3.7%	-9.7%

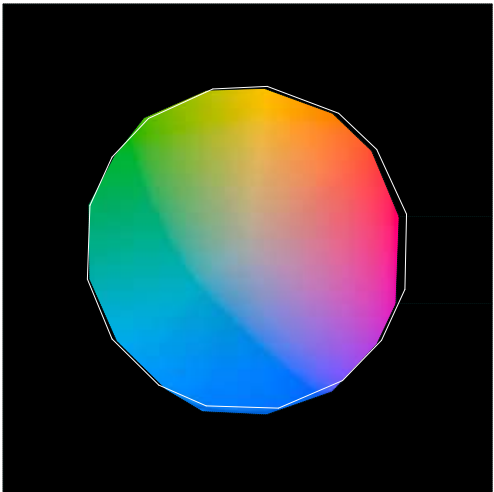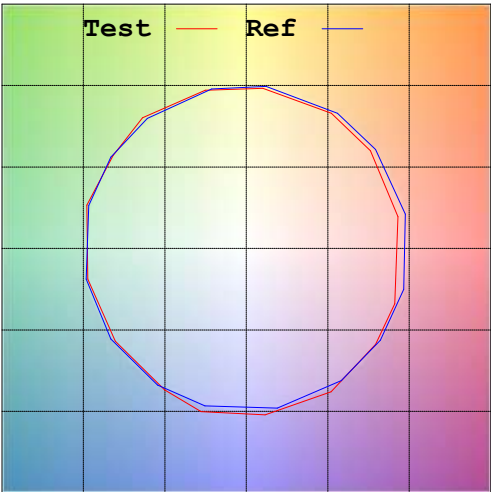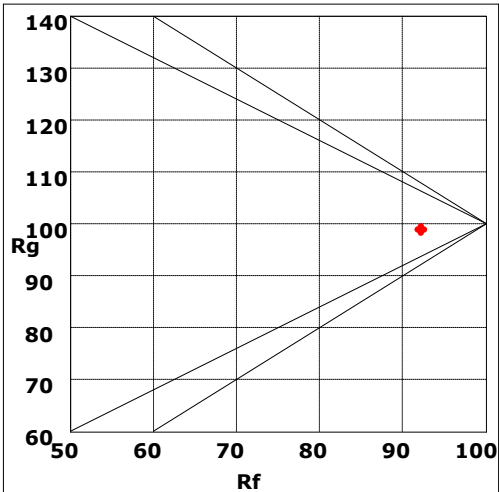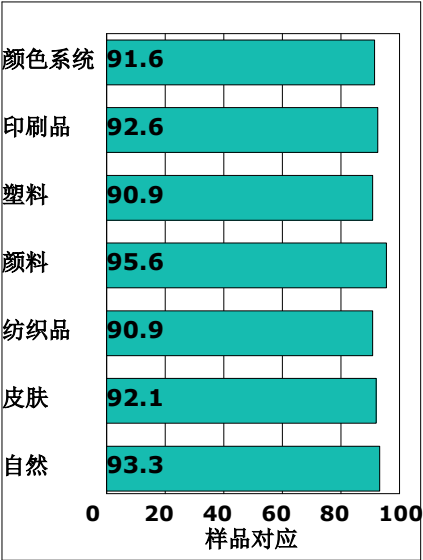

Rf by Bue



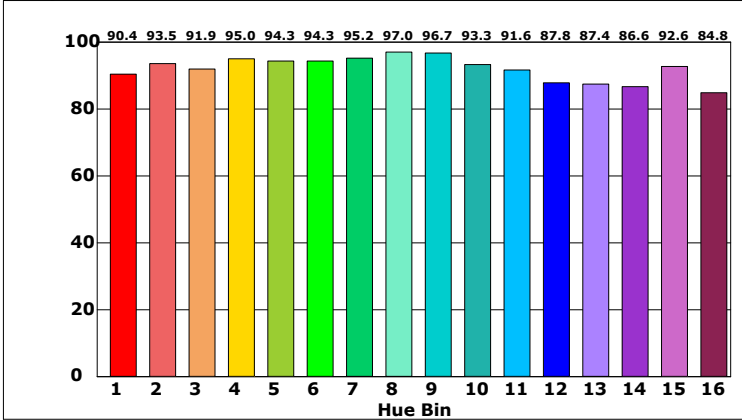


Chroma by Bue

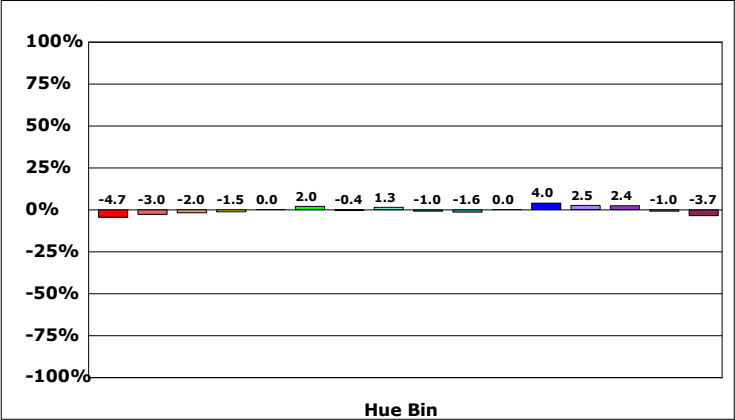

产品型号:S14d-500-SC
产品编号:
测试人员:
备注:

制造厂商:
Dongguan HongYu Lighting Technology Co.,LTD
测试单位:
测试日期:09/28/26

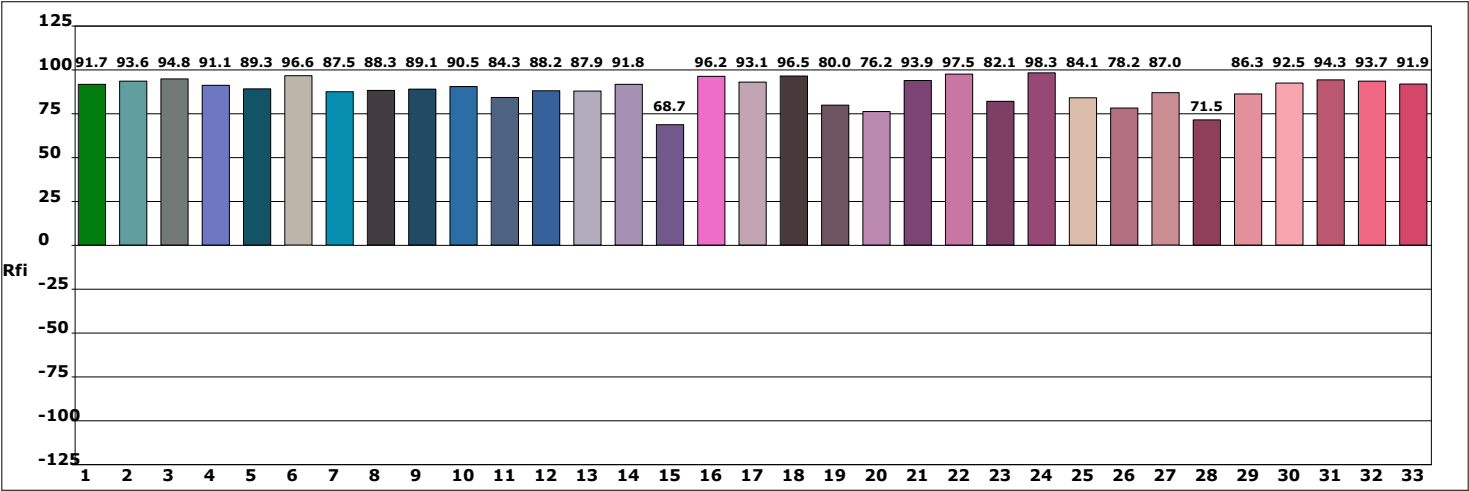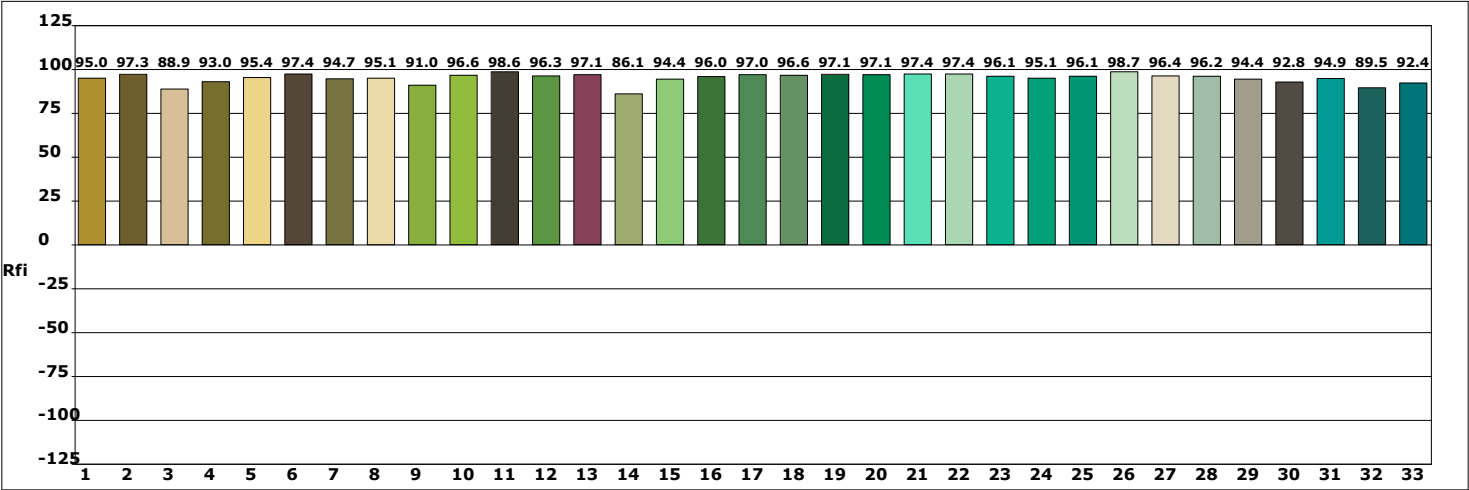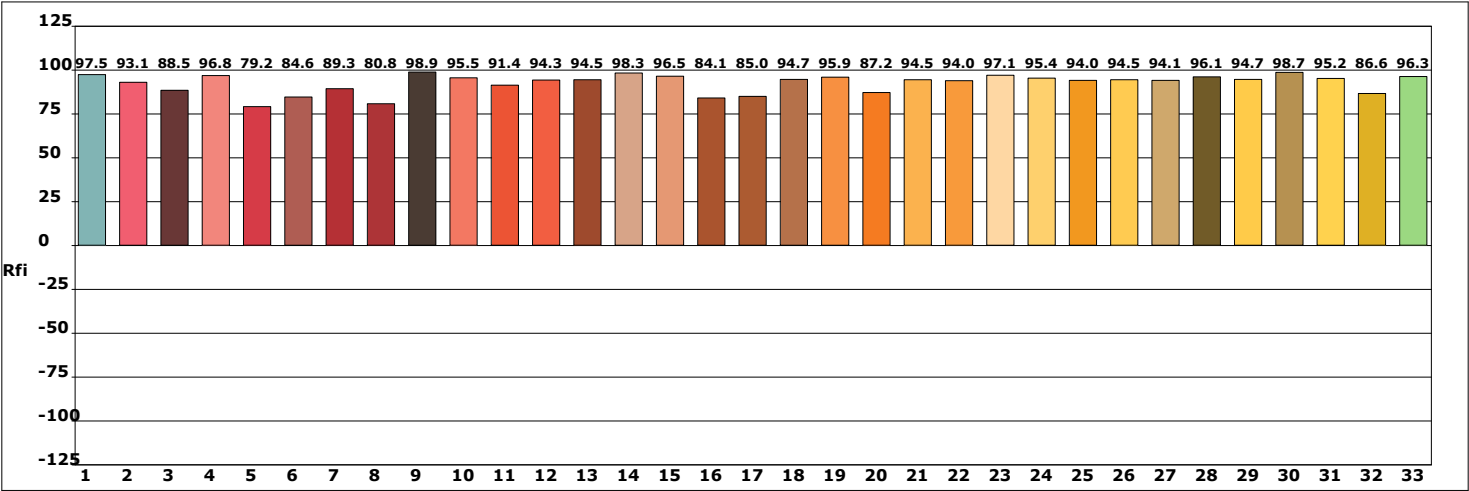

产品型号:S14d-500-SC
产品编号:
测试人员:
备注:

制造厂商:
Dongguan HongYu Lighting Technology Co.,LTD
测试单位:
测试日期:09/28/26