



光谱图

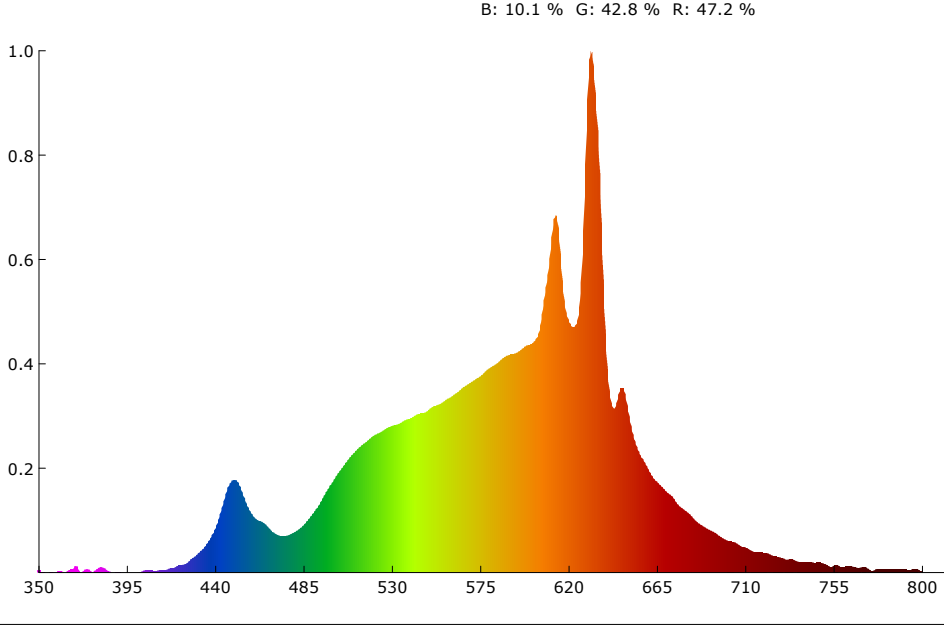

CIE1931

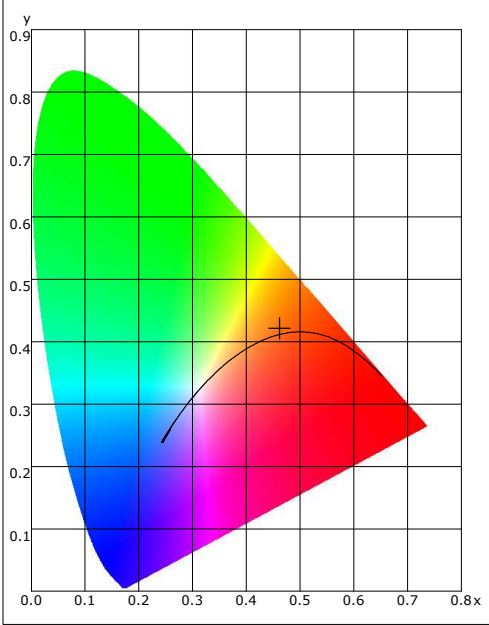


颜色参数：





GAI:	GAI_BB_8 : 97.58	GAI_BB_15 : 98.72	GAI_EES : 99.36	显色指数(Ra): 93.60	Ravg: 90.35
R 1: 94.70	R 2: 95.20	R 3: 94.90	R 4: 97.10	R 5: 94.20	R 6: 96.90
R 7: 93.60	R 8: 82.80	R 9: 57.80	R10: 87.60	R11: 98.30	R12: 83.30
R13: 94.50	R14: 95.70	R15: 88.60			
颜色质量表：	色彩饱和度Qa: 78.28	还原度Qf: 76.68	还原偏好Qp: 93.61	色域参数Qg: 80.90	
Q1: 74.68	Q2: 91.54	Q3: 86.11	Q4: 79.15	Q5: 77.23	Q6: 79.18
Q7: 81.00	Q8: 79.27	Q9: 75.46	Q10: 73.14	Q11: 75.33	Q12: 75.88
Q13: 78.53	Q14: 79.20	Q15: 76.55			
x: 0.46	y: 0.42	u: 0.26	v: 0.35	u': 0.26	v': 0.53
红色比:47.19%	绿色比: 42.75%	蓝色比: 10.06%	光通量红色比:2.25%	光通量绿色比: 71.95%	光通量蓝色比: 25.79%
相关色温(K):2747.00	光通量(lm):875.80	峰值波长(nm):631.60	色容差 :0.92		
明暗视觉比 :1.25	中心波长(nm):632.20	主波长(nm):582.87	质心波长(nm):587.10		
半宽度(nm):12.50	光通量红色比:25.79	光通量绿色比:71.95	光通量蓝色比:2.25		
黑体偏离duv:0.00	色纯度 %:65.13	LER(TM-30):328.78	辐射功率(mW):2663.75		
色域指数Rg :98.56	逼真度Rf :91.96	红光辐照度(uW/cm2):1218.77	近红辐照度(uW/cm2):70.47		
近红外辐照度(uW/cm2):4.81					
电参数					
电压(V):230.7000	电流(A):0.0400	功率(W):6.8900	功率因数 :0.7420		
能效 :138.4240	光效(Lm/W):127.1111	能效等级 :D			

产品型号:S14d-700-SC	制造厂商:
产品编号:	Dongguan HongYu Lighting Technology Co.,LTD
测试人员:	测试单位:
备注:	测试日期:09/28/26


Rf: 92.0 CCT: 2747K u': 0.2594
Rg: 98.6 LER: 328.8 Duv: 0.00359 v': 0.5316

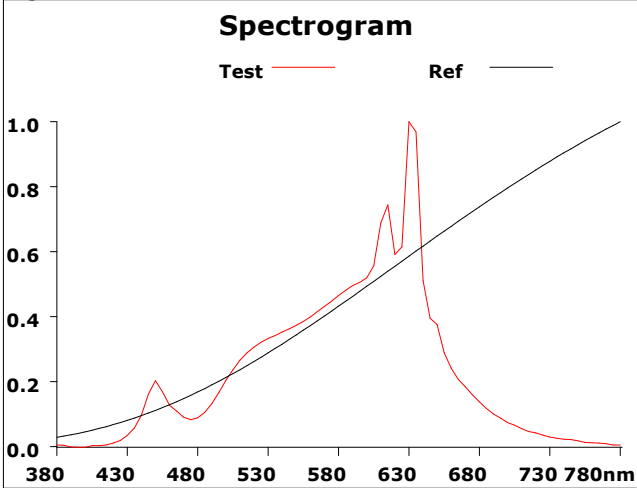


500			
Hue Bin	Rf	Chroma	Hue
1	89.8	-5.0%	-0.7%
2	93.2	-3.2%	1.2%
3	91.9	-2.2%	2.9%
4	95.1	-1.8%	1.4%
5	94.4	-0.3%	3.7%
6	94.5	1.7%	2.2%
7	95.0	-0.8%	-1.6%
8	96.9	1.3%	0.2%
9	96.7	-1.2%	0.0%
10	93.7	-1.3%	2.6%
11	92.0	0.1%	5.0%
12	87.6	4.1%	-2.2%
13	86.7	2.4%	-8.8%
14	85.8	2.2%	-9.9%
15	91.9	-1.3%	-4.1%
16	84.1	-4.1%	-10.0%

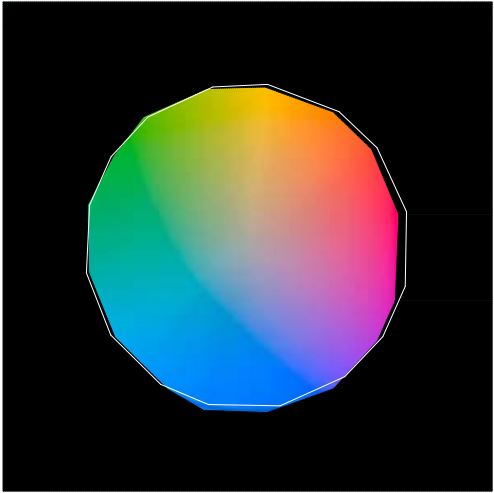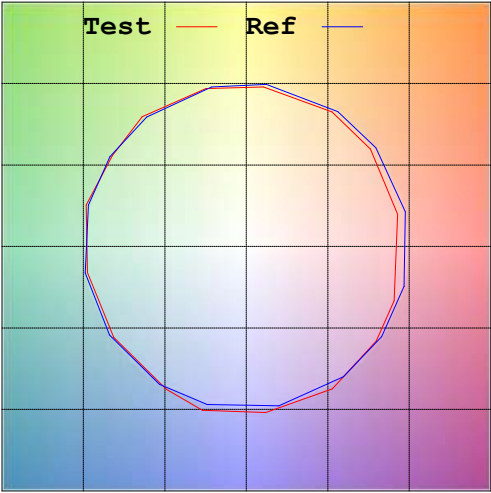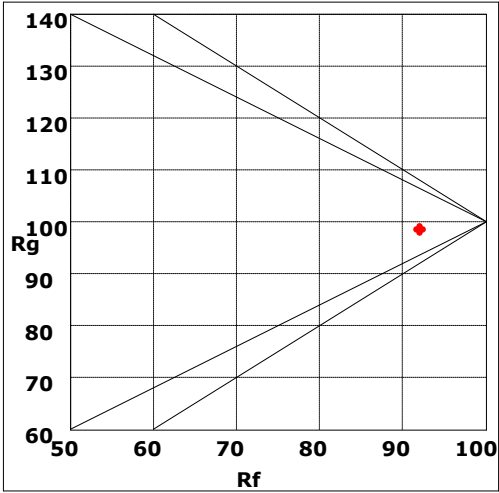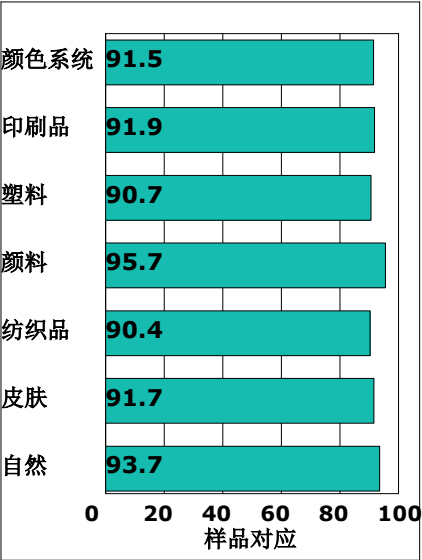

Rf by Bue



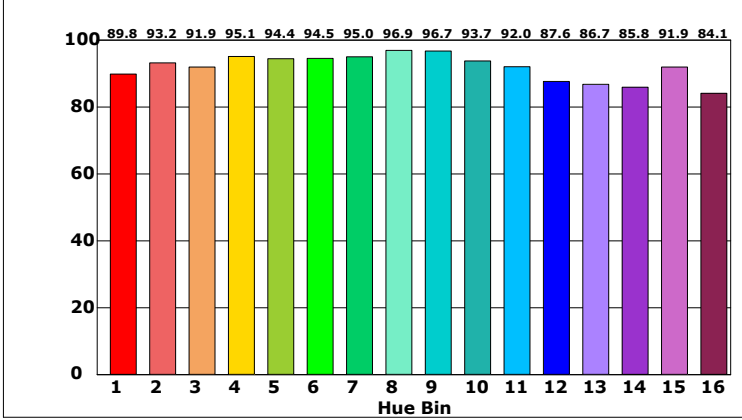


Chroma by Bue

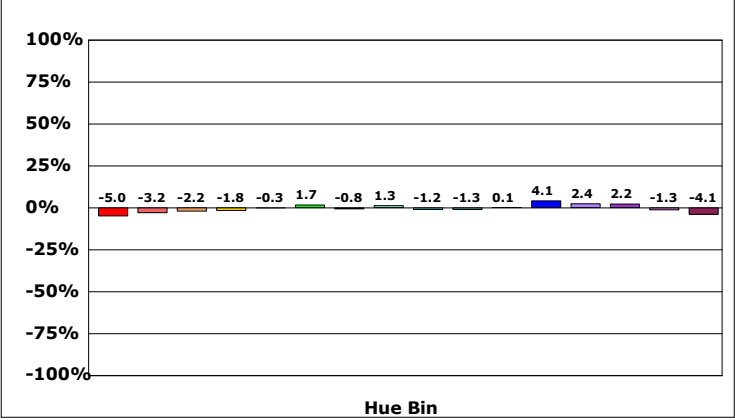

产品型号:S14d-700-SC
产品编号:
测试人员:
备注:

制造厂商:
Dongguan HongYu Lighting Technology Co.,LTD
测试单位:
测试日期:09/28/26

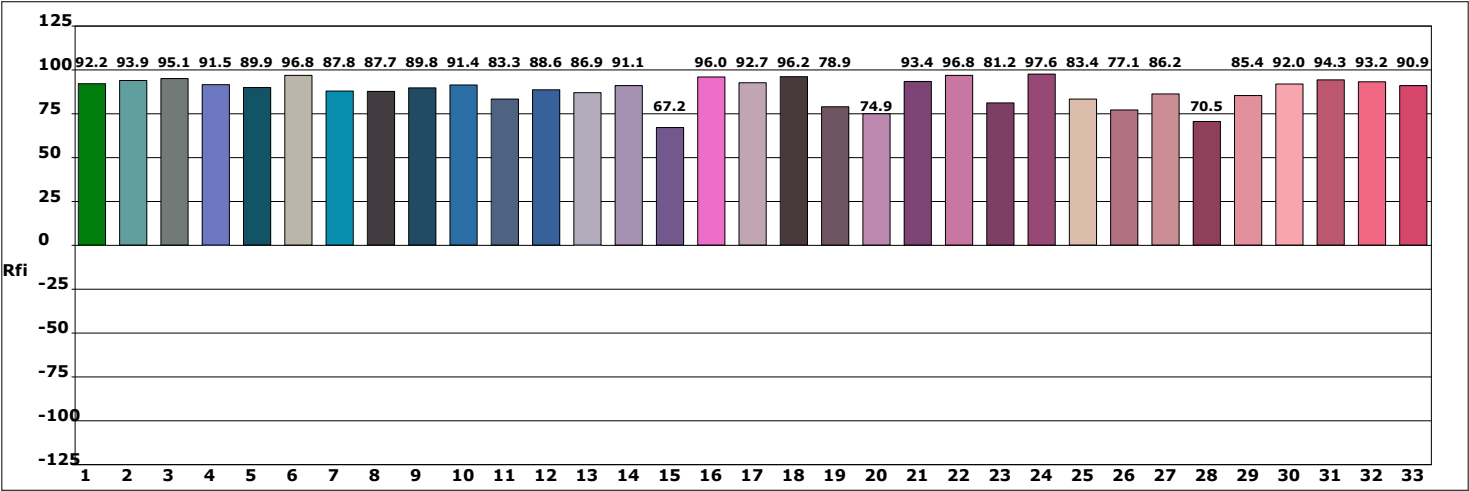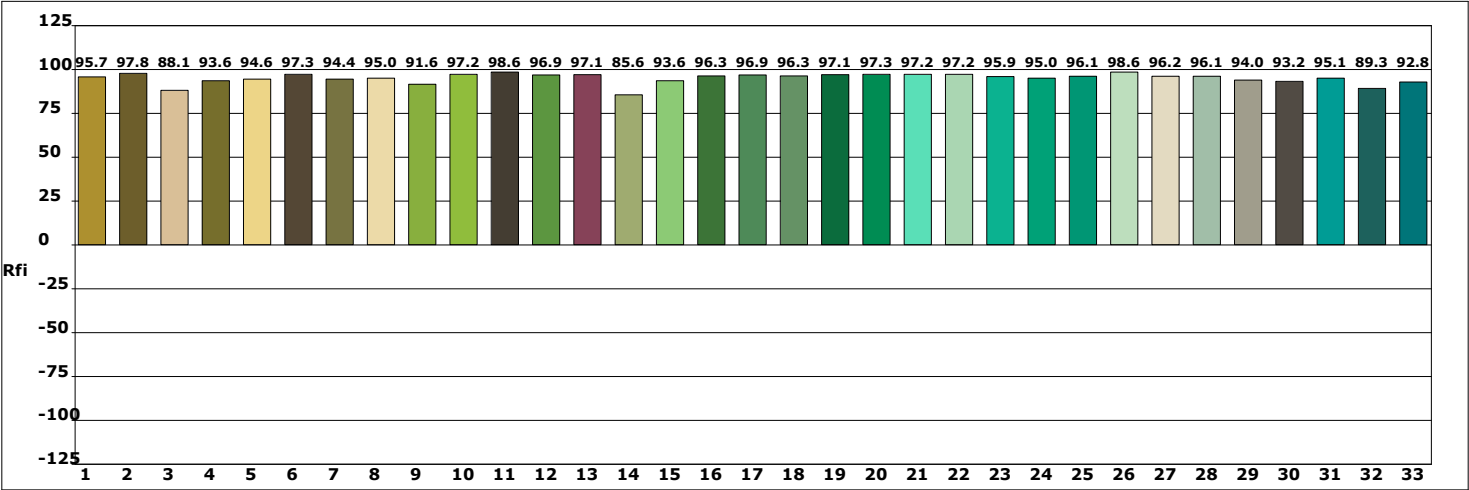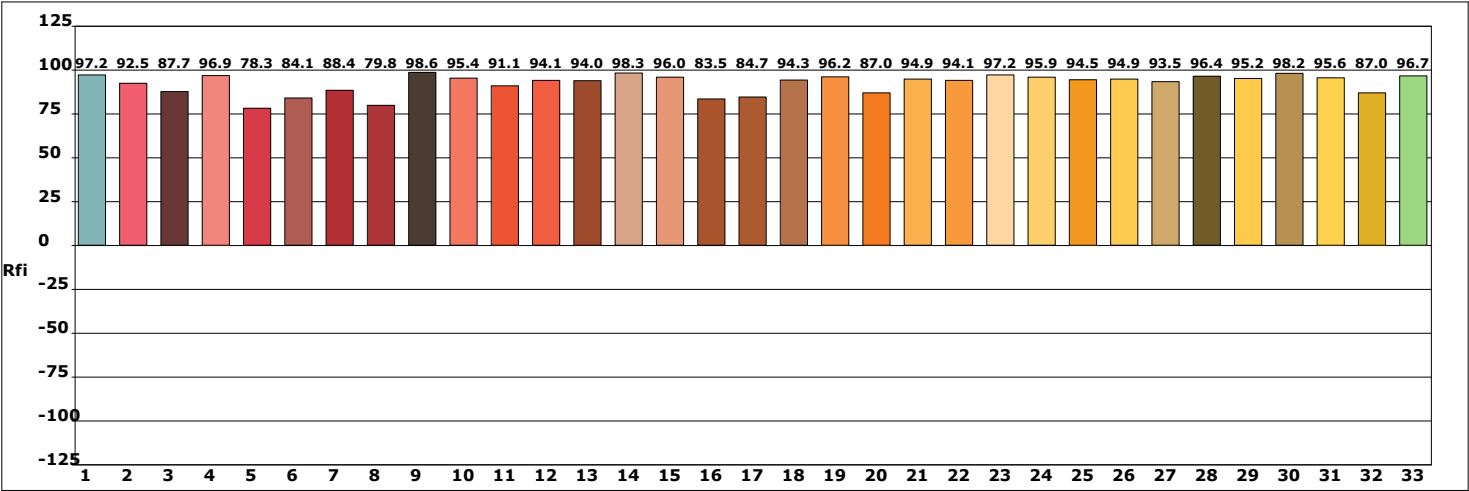

产品型号:S14d-700-SC
产品编号:
测试人员:
备注:

制造厂商:
Dongguan HongYu Lighting Technology Co.,LTD
测试单位:
测试日期:09/28/26